

LAWN MASTER® II Landscape Timer





LAWN MASTER® II LANDSCAPE TIMER

Saving water and saving time has never been easier. Lawn Master® II efficiently works with new or existing systems and drip irrigation to Automate watering – saving water and promoting a healthy landscape. And Lawn Master® II is simple to install and program.

- 4- or 6- Zones
- Pump Start and Rain Sensor ports
- Seasonal Adjust
- Simple to install and program



RAIN SENSOR COMPATIBLE

FEATURES & BENEFITS

AUTOMATE TRADITIONAL AND DRIP IRRIGATION SYSTEMS

3 Programs with up to 3 start times per program

EFFICIENTLY WORKS WITH NEW OR EXISTING SYSTEMS

SIMPLE TO INSTALL AND PROGRAM

4 Zone capacity with port for optional rain sensor

MONEY AND WATER SAVING FEATURES

- 3 Programs—For flexible watering according to plant type or zone type, including drip irrigation.
- Seasonal Adjust— Automatically adjusts run times for all zones for increased watering in hotter months and less watering during cooler months without reprogramming the timer.
- 3 Start Times— Enables customized programming according to plant types and water needs.
- $\bullet \ \ \mathsf{Rain} \ \mathsf{Sensor} \ \mathsf{Port} \ \ \mathsf{Easily} \ \mathsf{add} \ \mathsf{a} \ \mathsf{Toro} \ \mathsf{Rain} \mathsf{Sensor}^\mathsf{TM} \ \mathsf{for} \ \mathsf{water} \ \mathsf{conservation} \ \mathsf{without} \ \mathsf{troublesome} \ \mathsf{splicing}.$
- 365 Day Calendar— Conveniently enables programming based on municipal water restrictions.

DIMENSIONS

- 12.7 cm x 16.5 cm x 2.5 cm (5" H x 6.5" W x 1" D)
- Weight: 0.703 kg (1.55 lb)

ELECTRICAL SPECIFICATIONS

- · Electrical input power:
 - 220 VAC, 50 Hz
 - CE compliant
 - Battery Backup: 9-volt battery required
- Max Output to Valves
 - · 350mA per Station
- Transformer Input
 - 220 VAC, 50 Hz
- · Transformer Output
 - 24 VAC at 0,75 A
- Indoor/Outdoor: Indoor
- · Zone Capacity: 4-6 zones

OPERATING SPECIFICATIONS

- Independent Programs: 3
- Start Times: 3 per program (9 total)
- · Run Times: Up to 360 Minutes
- · Day Schedule Options:
 - · Specific days
 - Day interval
 - Odd/Even
 - Day exclusion
- · Modes of operation: Automatic, Manual Zone and Manual Program
- Seasonal Adjust: Increases or decreases watering time by 10-200% as seasons or weather change


ADDITIONAL FEATURES

- 3 independent watering programs and up to 3 start times per program, perfect for traditional and drip irrigation.
- Pump Start Relay and Rain Sensor Ports for easy connection with no wire splicing.
- 365 Day Calendar—Water on specific days of the week, odd or even days, or day interval, with day exclusion to meet water restrictions.
- Seasonal Adjust—Adjust run times as weather or seasons change.
- Three modes of operation—Automatic, Manual Station, and Manual Program.
- · Battery back-up stores programming (9 volt battery required).
- A.M./P.M. clock allows user to set length of watering from 1 minute to 6 hours

WARRANTY

· Two years

LAWN MASTER® II SERIES MODEL LIST		
Model	Description	
• LMII-4	Lawn Master® II Landscape Timer, 4 Zone	
• LMII-6	Lawn Master® II Landscape Timer, 6 Zone	

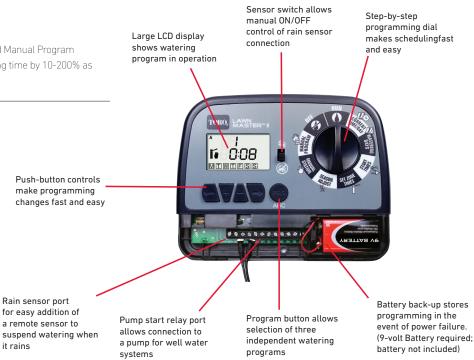

LAWN MASTER® II - SPECIFYING INFORMATION

LMII-X

DESCRIPTION	ZONES
LMII	<u>X</u>
LMII – Lawn Master® II Landscape InDoor Timer	4 – 4-Zones 6 – 6-Zones

Example: A 6-station Lawn Master® II timer in an indoor cabinet would be specified as LMII-4

Worldwide Headquarters The Toro Company 8111 Lyndale Ave. So. Bloomington, MN 55420 U.S.A. Phone: (1) 952 888 8801 Fax: (1) 952 887 8258



toro.com

©2014 The Toro Company

